

SPECIFICATIONS

Size	Metric	British
Max. Working Height A	4.99m	16ft 4in
Max. Platform Height B	2.99m	9ft 10in
Overall Length C	1.59m	5ft 3in
Overall Width D	0.75m	2ft 6in
Overall Height E	1.59m	5ft 3in
Ground Clearance	0.04m	2in
Wheelbase F	1.11m	3ft 8in
Turning Radius(Inside/Outside)	0m/1.30m	0/4ft 3in
Tyres		
- Front	Φ 254×63.50mm	Φ 10in×3in
- Back	Φ 305×63.50mm	Φ 1ft×3in




Performance		
S.W.L		
- S.W.L Of Platform(For Person)	135kg	297lb
- S.W.L Of Pallet(For Goods-Up)	90kg	198lb
- S.W.L Of Pallet(For Goods-Down)	115kg	253lb
Max. Occupants(Indoor/Outdoor)	1/0	1/0
Gradeability	15%	15%
Speed		
- Forward Speed(Stowed)	4.8km/h	3.0mph
- Back Speed(Stowed)	3.2km/h	2.0mph
- Travel Speed(Raised)	1.3km/h	0.8mph
Max. Working Slope	0°	0°
UP/Down Speed	18/18sec	18/18sec

Weight		
Weight	660kg	1455lb

Power		
Battery	24V/115Ah	24V/115Ah
Charger	24V/15A	24V/15A
Drive Motor	2×15VAC/ 0.68kW	2×15VAC/ 0.68kW
Lifting Motor	24VDC/1.4kW	24VDC/1.4kW



HYDRAULIC OIL FREE

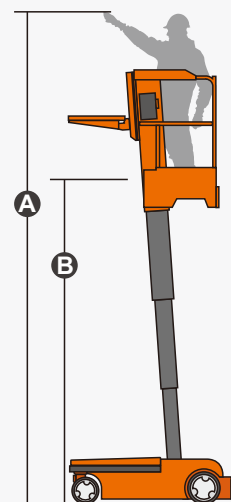

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Drivable At Full Height
- Non-Marking Tires
- Two-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Fault Diagnosis System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing Beacon
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Emergency Stop Button



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: export@cndingli.com

[Https://en.cndingli.com](https://en.cndingli.com)

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2022-09

